


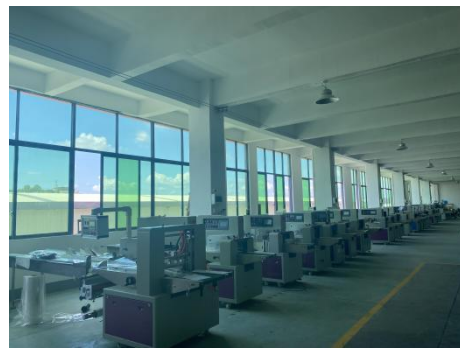

COMPANY 公司介绍 PROFILE

佛山市川美包装机械有限公司座落于中国广东省佛山市，是一家专注于包装机械研发、设计、生产、销售及服务为一体的技术型企业；

经过 10 多年的研发，我司已拥有 30 多个品种，包括枕式包装机、立式颗粒包装机、粉体包装机、液体酱体包装机等半自动、全自动包装生产线；产品性能稳定、操作简单、使用安全、外观新颖，远销捷克、德国、日本、新加坡、马来西亚、泰国、哥伦比亚、西班牙、瑞典、美国等 50 多个国家，广泛运用于食品、药品、化工、五金、生物肥料、玩具等行业。公司始终秉承“以技术为基础，以客户 需求为导向”致力于提供高性价比的包装解决方案，为客户创造最大化利益。

Foshan Chuanmei Packing Machinery Co.,Ltd, located in Foshan City, Guangdong Province, China. Our company is a high-tech enterprise, professional in researching and exploration, designing, manufacturing, sales and after-sales service.

With more than 10 years developing experiences, we have our own brand and developed more than 30 series packing machine, including automatic and semi-auto type for horizontal granule packing machine, powder packing machine, liquid and sauce packing machine, complete packaging line, which have been widely used in food, agricultural industry, pharmaceuticals, chemical industry and hardware industry etc.

All of our Chuanmei series packing machine have been tested and approved by CE. High quality products and timely complete service make us great reputation among clients, and we have exported to Japan, Germany, Malaysia, Thailand, Columbia, USA, Jordan, Spain, Portugal etc. We have the ability to provide you with the most cost-effective packaging project of manufacture, installation, training and after-sales service.

CM integrity, strength and quality of products recognized by the industry.



15

专注包装机械设备技术
Focus on packing machinery technology

致力于提供性能稳定/操作方便/使用安全/外形美观的包装设备
Committed to providing stable performance / easy to operate / safe to use / beautifully designed packaging equipment

15 YEARS



FOCUS

Keep improving, the details are demanding
精益求精细节苛求无以复加

样袋展示
Sample bag



性能特点
Feature

1. 双变频器控制，袋长即设即切，无需调节空走，一步到位，省时省膜。
2. 人机界面，参数设定方便快捷
3. 故障自诊断功能，故障显示一目了然
4. 高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确
5. 温度独立 PID 控制，更好适合各种包装材质
6. 定位停机功能，不粘刀，不浪费包膜
7. 传动系统简洁，工作更可靠，维护保养更方便

1. Dual frequency conversion control, bag length is random as setting(with servo is more advanced)
2. Interface features for easy setting and operation
3. Self diagnosis for clear failure display
4. High sensitivity photocell eye tracking,digital input for sealing and cutting position accurately
5. Temperature independent PID control to suitable for different packaging materials
6. Positioned stop function, without sticking knife and reduce wastage
7. Driving system for reliable working and convenient maintenance

适合包装饼类、饼干、蛋黄派、棒棒冰、酥饼、巧克力、糖果、一次性餐具、工业零件等。

Suitable for kinds of regular objects,such as biscuits, instant noodles, bread, cakes, pies, candy, ice-cream, medicine, commodity, hardware, soap, industrial components etc.

应用范围
Application

技术参数
Specification

型号	Model	CM-250	CM-320
袋长范围	Bag Length	65-190mm/120-280mm	65-190mm/120-280mm
袋宽范围	Bag Width	30-110mm	50-160mm
产品高度	Product Height(Max.)	60mm	60mm
膜卷直径	Film Roll Dia(Max.)	320mm	320mm
最大膜宽	FilmWidth(Max.)	250mm	350mm
包装速度	Packing Speed	40-230 packet/min	40-230 packet/min
电源规格	Power	220VAC50HZ,2.4Kw	220VAC50HZ,2.6Kw
机器尺寸	Dimension(mm)	3770(L)x670(W)x1450(H)	3770(L)x720(W)x1450(H)
机器净重	Net Weight	450Kg	475Kg
卷膜材质	Packaging Film	复合膜 Complexfilm (OPP/CPP,OPP/PE,PET/PE,PE/PE etc)	
备选功能	Optional	Air filling device/Linking device/Ethyl alcohol device 充气/连包/喷酒精	

下走膜枕式包装机 DOWN-FILM PILLOW PACKING MACHINE

样袋展示
Sample bag



性能特点
Feature

- 1.双变频器控制，袋长即设即切，无需调节空走，一步到位，省时省膜
- 2.故障自诊断功能，故障显示一目了然
- 3.高感度光电眼色标跟踪，数字化输入封切位置，使封切位置更加准确
- 4.温度独立 PID 控制，更好适合各种包装材质
- 5.定位停机功能，不粘刀，不浪费包膜
- 6.传动系统简洁，工作更可靠，维护保养更方便

1. Dual frequency conversion control, bag length is random as setting
2. Self failure diagnosis for clear failure display
3. High sensitivity photocell eye tracking,digital input for sealing and cutting position accurately
4. Temperature independent PID control to suitable for different packaging materials
5. Positioned stop function, without sticking knife and reduce wastage
- 6 Driving system for reliable working and convenient maintenance

适合包装多物料或散装产品，如毛巾、纸巾、鲜果、面条等。

Suitable for packing multi-material or bulk products,such as towel,tissue,fruit,noodle etc.

应用范围
Application

技术参数
Specification

型号	Model	CM-250X	CM-350X
袋长范围	Bag Length	65-190mm/120-280mm	65-190mm/120-280mm
袋宽范围	Bag Width	30-110mm	50-160mm
产品高度	Product Height(Max.)	60mm	80mm
膜卷直径	Film Roll Dia(Max.)	320mm	320mm
最大膜宽	FilmWidth(Max.)	250mm	350mm
包装速度	Packing Speed	40-230 packet/min	40-230 packet/min
电源规格	Power	220VAC50HZ,2.4Kw	220VAC50HZ,2.6Kw
机器尺寸	Dimension(mm)	3920(L)x670(W)x1400(H)	4020(L)x720(W)x1450(H)
机器净重	Net Weight	450Kg	475Kg
卷膜材质	Packaging Film	复合膜 Complexfilm (OPP/CPP,OPP/PE,PET/PE,PE/PE etc)	
备选功能	Optional	Air filling device/Linking device/Ethyl alcohol device 充气/连包/喷酒精	

伺服枕式包装机

SERVO MOTOR CONTROL
PACKING MACHINE

样袋展示
Sample bag



性能特点
Feature

1. 三伺服电机系统控制，端封、中封和入料可以独立控制。
2. 袋长不限，可选择定长模式和不定长模式。
3. 无空包，切料自动停机。
4. 制袋长度更精准，可对接生产线。
5. 可选择两端封口和单边封口

1. Three servo motor system control, end sealing, middle sealing and feeding can be independently controlled
2. Bag length is not limited, can choose fixed length mode and variable length mode
3. No empty bag, cutting material automatic stop.
- 4.The bag-making length is more accurate, which can be connected to the production line.
5. Two end sealing and one side sealing can be selected

适合包装饼类、饼干、蛋黄派、棒棒冰、酥饼、巧克力、糖果、一次性餐具、工业零件等。

Suitable for kinds of regular objects,such as biscuits, instant noodles, bread, cakes, pies, candy, ice-cream, medicine, commodity, hardware, soap, industrial components etc.

应用范围
Application


技术参数
Specification

型号	Model	CM-250X Servo	CM-350X Servo
袋长范围	Bag Length	70-limitless	80--limitless
袋宽范围	Bag Width	30-110mm	50-160mm
产品高度	Product Height(Max.)	60mm	60mm
膜卷直径	Film Roll Dia(Max.)	320mm	320mm
最大膜宽	FilmWidth(Max.)	250mm	350mm
包装速度	Packing Speed	40-230 packet/min	40-230 packet/min
电源规格	Power	220VAC50HZ,2.4Kw	220VAC50HZ,2.6Kw
机器尺寸	Dimension(mm)	(L)3920x(W)670x(H)1320	(L)3920x(W)720x(H)1320
机器净重	Net Weight	450Kg	475Kg
卷膜材质	Packaging Film	复合膜 Complexfilm (OPP/CPP,OPP/PE,PET/PE,PE/PE etc)	
备选功能	Optional	Air filling device/Linking device/Ethyl alcohol device 充气/连包/喷酒精	

下走膜枕式包装机

DOWN-FILM PILLOW
PACKING MACHINE

样袋展示
Sample bag



性能特点
Feature

1. 三伺服电机系统控制，端封、中封和入料可以独立控制。
2. 袋长不限，可选择定长模式和不定长模式。
3. 无空包，切料自动停机。
4. 制袋长度更精准，可对接生产线。
5. 可选择两端封口和单边封口

- 1.Three servo motor system control, end sealing, middle sealing and feeding can be independently controlled
- 2.Bag length is not limited, can choose fixed length mode and variable length mode
3. No empty bag, cutting material automatic stop.
- 4.The bag-making length is more accurate, which can be connected to the production line.
5. Two end sealing and one side sealing can be selected

适合包装大的、多物料或散装产品，如多类型蔬菜水果、毛巾、纸巾、鲜果、面条等。

Suitable for packing large、 multi-material or bulk products,such as fresh vegetables and fruits 、 towel,tissue,fruit,noodle etc.


应用范围
Application

技术参数
Specification

型号	Model	CM-700X	CM-800X
袋长范围	Bag Length	100--limitless	120-limitless
袋宽范围	Bag Width	100-330mm	100-380mm
产品高度	Product Height(Max.)	130mm	180mm
膜卷直径	Film Roll Dia(Max.)	320mm	320mm
最大膜宽	FilmWidth(Max.)	700mm	800mm
包装速度	Packing Speed	30-90 packet/min	30-90 packet/min
电源规格	Power	220VAC50HZ,2.4Kw	220VAC50HZ,2.6Kw
机器尺寸	Dimension(mm)	4000(L)x1100(W)x1450(H)mm	4000(L)x1100(W)x1450(H)mm
机器净重	Net Weight	700Kg	800Kg
卷膜材质	Packaging Film	复合膜 Complexfilm (OPP/CPP,OPP/PE,PET/PE,PE/PE etc)	
备选功能	Optional	Air filling device/Linking device/Ethyl alcohol device 充气/连包/喷酒精	

»多头组合称量全自动包装机

Full Automatic Multihead Weighing Packaging Machine

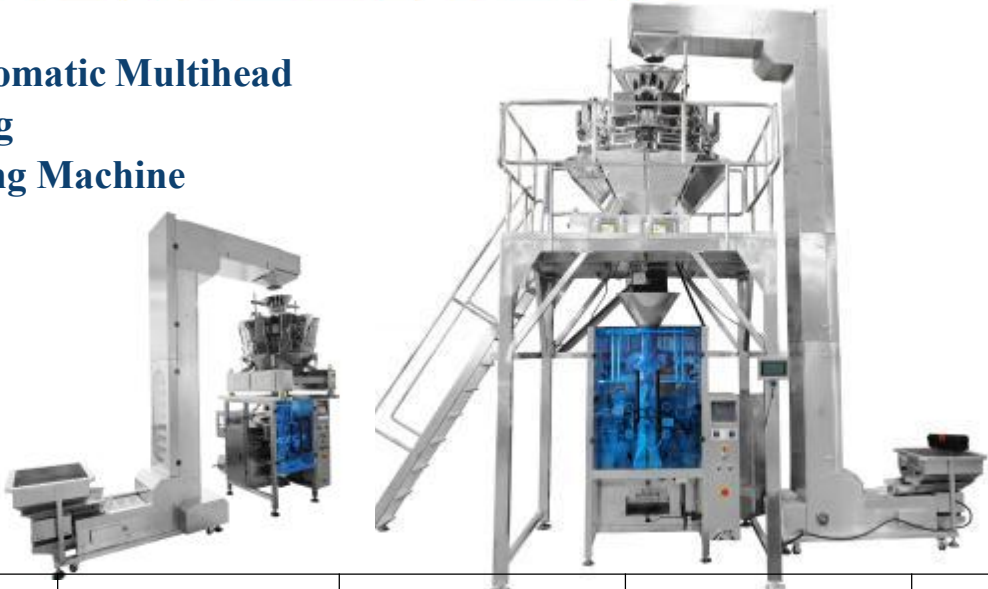


机械型号 Model	CM-320AZ	CM-420AZ	CM-520AZ	CM-720AZ	
薄膜宽度 Film Width	Max.320mm	Max.420mm	Max.520mm	Max.720mm	
制袋长度 Bag Length	80~240mm	80~300mm	80~350mm	100~450mm	
制袋宽度 Bag Width	50~150mm	60~200mm	80~250mm	100~350mm	
计量范围 Filling range	150~800ml	150~1500ml	150~2000ml	150~4000ml	
薄膜厚度 Film thickness	0.04~0.08mm				
卷膜直径 Roll Diameter	Max.320mm				
包装速度 Packing Speed	5~70 包/分 5~70 bags/min	5~60 包/分 5~60 bags/min	10~50 包/分 10~50 bags/min	10~40 包/分 10~40 bags/min	
电源规格 Power	220V, 50/60HZ, 2KVA	220V, 50/60HZ, 2.2KVA	220V, 50/60HZ, 3KVA	220V, 50/60HZ, 3.6KVA	
Machine Size	(L)1185x(w)935x(H)1245mm	(L)1217x(w)1015x(H)1343mm	(L)1488x(w)1080x(H)1490mm	(L)1716x(w)1260x(H)1820mm	
Machine Weight	550KG	650KG	750KG	900KG	
可选配置 Optional Device	双拉膜机构 Double Film Pulling Device	插角机构 Angle of Plug-in Device	自动纠偏机构 Automatic Correct Device	连袋装置 Linking Bags Device	打孔装置 Punching Device
机器包装 Machine Wrapping	木箱/夹板木箱 Standard Export wooden Case				

应用范围 Application

适合要求计量精度高及易碎的散状物体的包装： 如膨化食品、 锅巴、果冻、 糖果、开心果、苹果片、水饺、朱古力、 气球、 橡胶绳、螺丝螺帽等小五金药材片等。

Requirement for high precision measurement and fragile packaging bulk goods, such as: puffed food, crispy rice, fruit chips, sweets, pistachio, apple slices, dumpling, chocolate, balloon, rubber, Screw the Nut hardware item, medicines etc.

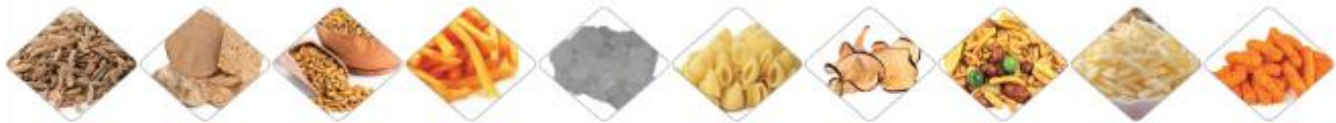

性能特点 Feature

- 1.全新设计，亮丽外观，结构更合理，技术更先进。
- 2.彩色触摸屏幕，全数控调节，操作方便灵活。进口伺服运膜系统，双拉膜结构，精密传感定位准确，性能卓越
- 3.进口 PLC 全电脑控制系统，彩色触摸屏，操作方便，直观高效。
- 4.进口伺服运膜系统，进口色标传感器，定位准确，整机性能卓越，包装效果美观
- 5.PID 独立双温控仪表控制，更适合各种包装材质
- 6.袋形多样化，可为客人提供枕形袋，插角袋，挂孔袋，连袋等
- 7.一机多用途，适合同类型产品的多元化包装.

- 1.Brand new design with bright appearance, reasonable structure and advanced technology
- 2.Digital screen display with numerical setting and flexible operation.
- 3.Imported PLC control system and color touching screen enable easy and efficient operation.
- 4.Imported servo film driving system and color sensor enable accurate position, beautiful packaging and excellent performance.
- 5.PID independent control of temperature, more suitable for different packaging materia
- 6.Diversified bag-shaped provide pillow-shaped bags, standing bags, hanging bags, linking bags and etc.
- 7.Multipurpose packaging, suitable for various packaging of similar product.

CM-I60A

颗粒包装机

GRANULE
PACKING MACHINE

样袋展示
Sample bag



性能特点
Feature

1. 设计合理、运行稳定

2. 性能卓越、噪音低

3. 触摸屏控制，操作简单

4. 空间小，多功能包装
1. Reasonable design with stably operation

2. Low noise with fast packing speed

3. Touch screen control system,easy to operate

4. Automatic packaging function with small space

应用范围
Application

适合包装颗粒状、片状、条状、粉状产品，如饼干、油炸食品、虾条、花生、豆类、白糖、咖啡等。
Suitable for powder or small grain packaging,such as coffee,sugar,puffed,beans,biscuit etc.

技术参数
Specification

型号	Model	CM-160A
袋长范围	Bag Length	50-200mm
袋宽范围	Bag Width	50-150mm
最大膜宽	Film Width	320mm (Max.)
包装速度	Packing Speed	35-60 packet/min
电源	Power	220V AC 50HZ,single phase,2.2Kw
包装材质	Packaging Film	Complex film (OPP/CPP,OPP/PE,PET/PE etc)
机器尺寸	Dimension	1150(L)x750(W)x1680(H)mm
机器净重	Net Weight	280Kg



CM-I60B

半自动链斗包装机

SEMI-AUTO PACKING
MACHINE



性能特点
Feature

1. 设计合理、结构简单，操作方便

2. 人工投料、链斗输送，方便投料或多物料同时投放

3. 方便清理，成本低，空间小
1. Easy operation with stably structure

2. Feeding manually,flexible packaging


3. Economic cost.easyfor cleaning,small space

应用范围
Application

适合包装易碎或多物料产品，如薯片、锅巴、红糖、玩具、卡片等。
Suitable forfragilejrregular-shape or more products packaging.such as chips,puffing,toys,screw,card etc.

技术参数
Specification

型号	Model	CM-160B
袋长范围	Bag Length	50-200mm
袋宽范围	Bag Width	50-150mm
最大膜宽	Film Width	320mm (Max.)
包装速度	Packing Speed	40-60 packet/min
电源	Power	220V AC 50HZ,single phase,2.2Kw
包装材质	Packaging Film	Complex film (OPP/CPP,OPP/PE,PET/PE etc)
机器尺寸	Dimension	1750(L)x750(W)x1480(H)mm
机器净重	Net Weight	260Kg

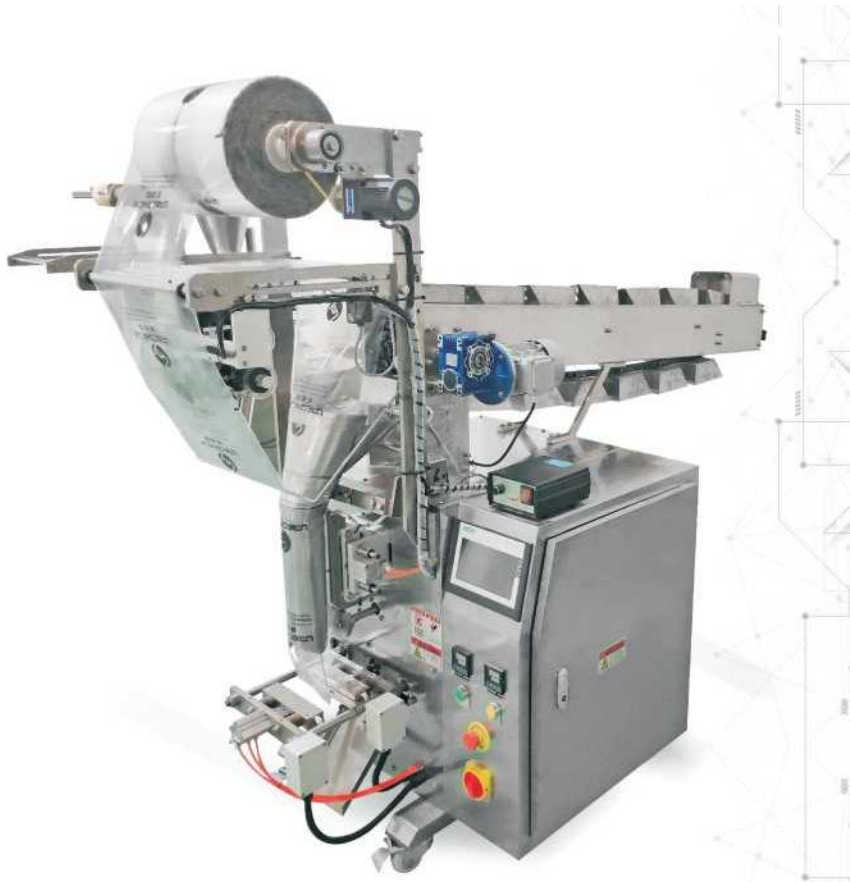

CM-I60F

粉剂包装机

POWDER
PACKING MACHINE

样袋展示
Sample bag



性能特点
Feature

- 1.设计合理，结构紧凑
- 2.步进电机驱动，性能稳定
- 3.精度高、速度快、噪音低
- 4.全自动计量、充填、制袋、封口及输出

- 1.Compact structure,small space
2. Stepper motor drive.reliable performance
3. Precise measuring,fast speed,low noise
4. Automatically forming bag,measuring,filling,printing and output

应用范围
Application

适合包装各种粉状物料，如药粉、咖啡粉、奶粉、豆粉、面膜粉、**调料粉**等。

Suitable for different powder,such as herb powder,coffee powder, milk powder.bean powder,mask powder and spices powder etc.

技术参数
Specification

型号	Model	CM-160F
袋长范围	Bag Length	50-200mm
袋宽范围	Bag Width	50-150mm
最大膜宽	Film Width	320mm (Max.)
包装速度	Packing Speed	30-60 packet/min
电源	Power	220V AC 50HZ,single phase,2.2Kw
包装材质	Packaging Film	Complex film (OPP/CPP,OPP/PE,PET/PE etc)
机器尺寸	Dimension	1150(L)x750(W)x1860(H)mm
机器净重	Net Weight	330Kg



CM-I60Y

液体包装机

LIQUID
PACKING MACHINE

样袋展示
Sample bag



性能特点
Feature

- L 结构合理、运行稳定
2. 精度高、操作安全
3. 噪音低、清洁方便

1. Reasonable structure with stable performance
2. Precise measuring,fast speed,safe operation
3. Economic,low noise,small space

应用范围
Application

适合包装液体状或粘稠状产品，如洗发水、果汁、番茄酱、沙拉酱等。

Suitable for liquid or sauce packaging,such as tomato sauce, juice,water,mayonnaise etc.

技术参数
Specification

型号	Model	CM-160Y
袋长范围	Bag Length	50-200mm
袋宽范围	Bag Width	50-150mm
最大膜宽	Film Width	320mm (Max.)
包装速度	Packing Speed	30-60 packet/min
包装袋型	Bag Type	Pillow bag orside sealing bag
电源规格	Packaging Film	220V AC 50HZ,single phase,2.2Kw
包装材质	Dimension	Complex film (OPP/CPP,OPP/PE,PET/PE etc)
机器尺寸	Net Weight	1150(L)x750(W)x1860(H)mm





CM-DI **MULTIHEAD**
多头组合秤 **WEIGHER**

适合包装各种粒状、片状、条状、圆状及不规则形状的颗粒定量称重，如干果、坚果、膨化食品、五谷杂粮、糖果饼干、五金塑料件等。

Suitable for weighing various particles,flake,strip,round and irregular materials, packaging.such as dried fruit,nuts,chips,grain,biscuit,candy.screw,plastic part etc. 适合定量粉状或颗粒状的产品



CM-D04 **4-LINEAR**
四头线性称 **WEIGHER**

适合定量粉状或者颗粒状的产品如面粉、砂糖、坚果、豆类等；计量精准速度快，功能多样化，成本低。

Suitable for weighting different powder or grain,such as flour,sugar,nuts,beans etc Multifunctional,Economic.precise and fast.
主要适合五谷杂粮、糖果饼干、冷冻食品、膨化食品等颗粒状的供料系统，提升机与



CM-S37 **ZTYPE MATERIAL**
Z 型提升机 **ELEVATOR**

电子计量称配套使用，实现自动供料和停止的自动化功能。

Application for vertical lifting for different granule material,such as grain, candy,biscuit,frozen food,chips etc ; The elevator is used togetherwith multihead weigher .realizing automatic feeding system.



CM-SI5 **SPIRAL**
螺杆上料机 **CONVEYOR**

振动螺旋上料机能够提升不同粉料，通常与包装机配套使用，实现料位跟踪自动 供料系统；也可单独用于其他场合的粉料提供。

The vibrating spiral feeder can lift various powder materials,match with packing machine to realize material level tracking and automatic feeding.also can be used for other industry.



CM-F35 **AUGER**
粉剂头 **FILLER**

适合计量各类粉末，如奶粉、面粉、咖啡粉、调料粉、蛋白粉、固态饮品粉末等，能自动完成计量、充填，可与包装机配套使用或单独半自动灌装。

Suitable for kinds of powder weighing,such as milk,flour,coffee powder,spices, protein powder,fruit powder etc,auto measuring and filling,it can connect with packing machine or semi-auto filling.



CM-Y02 **LIQUID**
液体泵 **PUMP**

主要用于各种液体酱料的自动定量充填，如水、番茄酱、沙拉酱、油、药液及 其他非食品类洗涤剂，广泛应用于食品、医药、化工行业等。

Widely used in food,pharmaceuticals,chemical industry ofweighing and filling for water,sauce,oil,paste etc.



CM-S20 **FINISHED PRODUCT**
成品输送机 **CONVEYOR**

主要将自动包装好的成品袋装产品输送到检测平台或打包平台 通常为皮带式或链板式，尺寸款式均可定制。

Used forttransporting the finished sachet to the checking platform Belt type and chain type,customized are available.



CM-SI2 **ROTARY**
圆盘理料机 **TABLE**

用于中小袋的过渡存储
直径通常为 600mm,高度 750-800mm

For collecting the finished products
Out Dia.=600mm,height=750-800mm

EXPANDED FOOD
PACKAGING PRODUCTION LINE
全自动食品包装生产线




组成
Compose


- I vertical packer 立式包装机
- II multihead weigher 多头组合秤
- III Z type material elevator 提升机
- IV supporting platform 支撑平台
- V Output conveyor 成品输出

优势
Advantage


- 1.集中供料结构紧凑，空间占用小；
- 2.节约设备成本及人工操作成本；
- 3.利于整体控制，效率高。
- 1. Concentrated feeding system with small space
- 2. Economic with less operation workforce cost
- 3. Easily to operate with one controller.

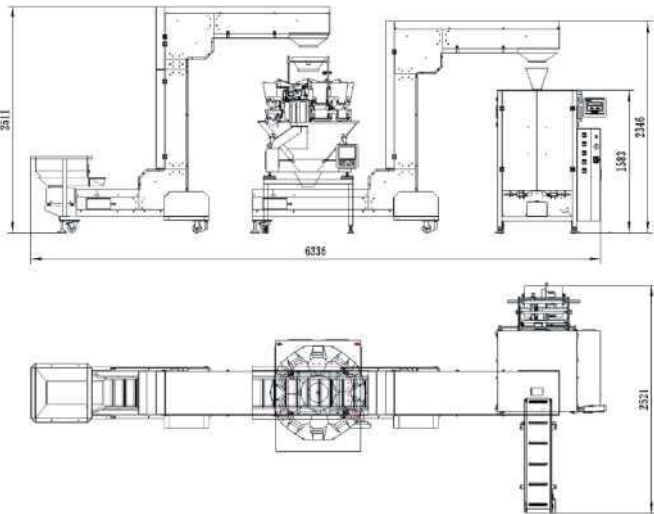

BACK SEALING TYPE

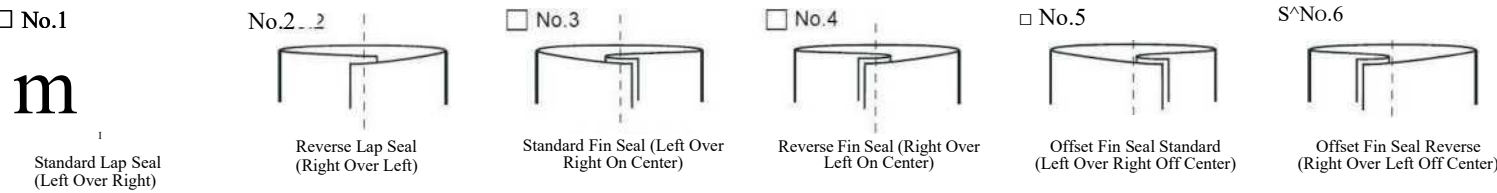

END SEALING TYPE

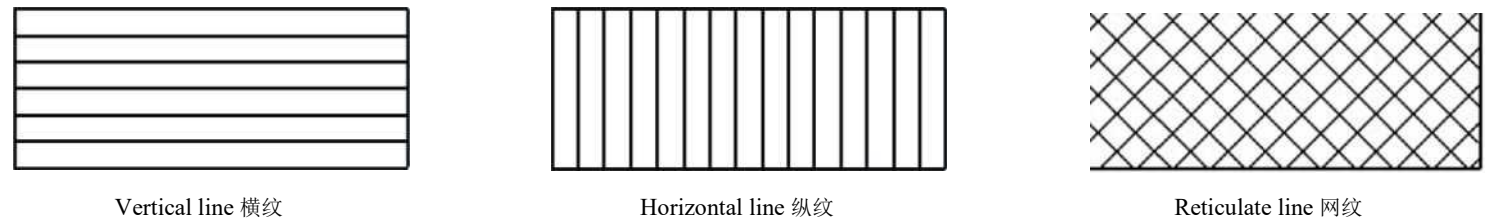

BAG TYPE



WORKSHOP SHOW



OUR TEAM



ENTERPRISE SALES NETWORK

